


AR5005G

Single chip 802.11b/g WLAN Solution



Enables low-cost 802.11b/g products while maintaining range and throughput performance


AR5005G Solution Highlights

- Highly integrated single chip CMOS solution with multiprotocol MAC/baseband processor and 2.4 GHz radio
- Uses digital CMOS technology exclusively, minimizing power consumption and cost while maximizing reliability
- Support for IEEE 802.11b, 802.11g
- 802.11e standard compatible bursting
- Atheros XR™ eXtended Range technology to give Wi-Fi products twice the range of existing designs
- Wireless Multimedia Enhancements Quality of Service support (QoS)
- Hardware encryption for the Wi-Fi Protected Access (WPA) and IEEE 802.11i security specifications, provides Advanced Encryption Standard (AES), Temporal Key Integrity Protocol (TKIP) and Wired Equivalent Privacy (WEP) without performance degradation
- Support for draft IEEE 802.11e, h, i and j standards
- Power-saving design improvements reduce system power consumption up to 98%

AR2413 Single-Chip CMOS MAC/Baseband/Radio

- Support for IEEE 802.11b, 802.11g
- Operates from 2.300 - 2.500 GHz
- Advanced wideband receiver with best path sequencer for better range and multipath resistance than conventional equalizer-based designs
- Integrated low-noise amplifier (LNA)
- External PA and/or LNA can be used for special applications
- Eliminates all IF filters and most RF filters; no external voltage-controlled oscillators (VCOs) or surface acoustic wave (SAW) filters needed
- Enhanced transmit and receive chains
- No external FLASH or RAM memory needed
- PCI 2.3 and PC Card 7.1 host interfaces with DMA support
- Integrated analog-to-digital and digital-to-analog converters
- High speed UART with DMA supports data rates up to 1 Mbps
- Serial EEPROM, LEDs, GPIOs peripheral interfaces
- Low power operational and sleep modes

AR5005G WLAN System Architecture

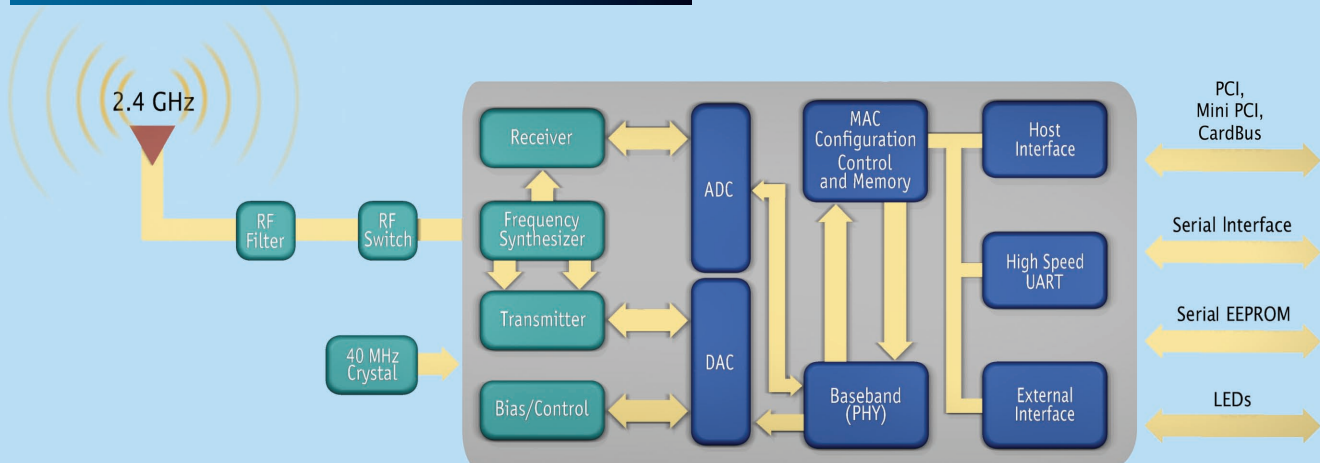

AR2413

AR5005G 802.11b/g CardBus Card

AR5005G Solution Specifications


Frequency Band	2.300 to 2.500 GHz
Network Standard	802.11b, 802.11g
Modulation Technology	OFDM with BPSK, QPSK, 16 QAM, 64 QAM; DBPSK, DQPSK, CCK
FEC Coding Rate	1/2, 1/3, 1/4
Hardware Encryption	AES, TKIP, WEP
Quality of Service	802.11e draft
Media Access Technique	CSMA/CA
Host Interface	Mini PCI, CardBus, PCI
Communication Interface	High speed UART
Peripheral Interface	GPIOs, LEDs
Memory Interface	EEPROM

Supported Data Rates

IEEE 802.11b	1 to 11 Mbps
IEEE 802.11g	1 to 54 Mbps


Chip Specifications

	AR2413
Operating Voltage	1.8V +/-5% 3.3V +/-10%
Package Dimensions	13mm x 13mm
Package	224 Plastic Ball Grid Array

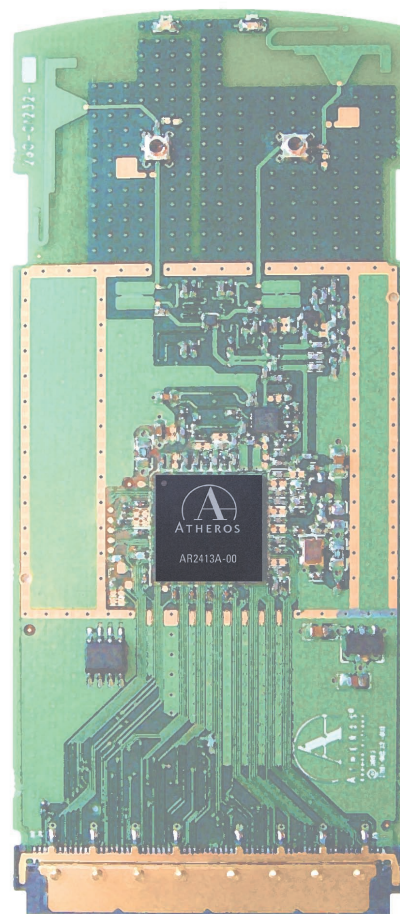

- Windows® drivers for Windows XP, Windows 2000, Windows ME, Windows 98 SE and Windows NT 4.0
- A single driver and firmware code base supports all Atheros chipsets, and provides both backward and forward compatibility with Atheros previous and next-generation multi-standard designs.
- Integrated WPA supplicant supports Windows XP, Windows 2000, Windows ME, Windows 98 SE and Windows NT 4.0
- Client utility supports configuration profiles, current link status, statistics and diagnostics

AR5005G 802.11b/g Mini PCI

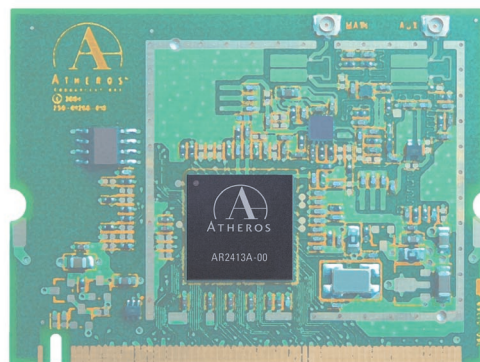

Atheros Communications, Inc.
tel: 408-773-5200 fax: 408-773-9940

Atheros Communications, KK – Japan
tel: +81-3-5501-4100 fax: +81-3-5501-4129

Atheros Communications, International LLC – Hong Kong
tel: 852.82061131 fax: 852.82061301

Atheros Communications, International LLC – Taiwan
tel: 886 2 8751 6385 fax: 886 2 8751 6397

For more information on Atheros and Atheros WLAN Technology please visit www.atheros.com
Specification subject to change, © 2004 Atheros Communications, all rights reserved.
Atheros, the Atheros logo, Fast Frames, are trademarks of Atheros Communications, Inc.
All other trademarks mentioned in this document are the property of their respective owners.